

CAT50



SINGLE COLUMN CHAIN AUTOMATION FOR DELIMITATION OF PRIVATE PROPERTIES



CAT50 single column automation allows you to restrict access to your private property,

The automation consists of a single column that contains the chain collecting mechanism inside and the control electronics.

The chain can be raised and lowered by pressing simply a button on the remote control.

CAT50

Technical specifications

CODE CAT/50

ELECTRICAL DATA

POWER SUPPLY	230V 50Hz
MOTOR VOLTAGE	24V CC
CURRENT (A)	4
POWER (W)	90

PERFORMANCE DATA


OPENING TIME (SECONDS)	10
MAX CHAIN LENGTH (METERS)	8

DIMENSIONAL AND GENERAL DATA


DIMENSIONS (MM)	175x208x1000
OPERATING TEMP (°C MIN/MAX)	-20 +50 °C
WEIGHT (KG)	28

Installation reference

- [1] Chain barrier CAT50
- [2] Wall or column on opposite site
- [3] Chain
- [4] Counterweight
- [5] Fuse
- [6] Chain collector
- [7] Radiotransmitter

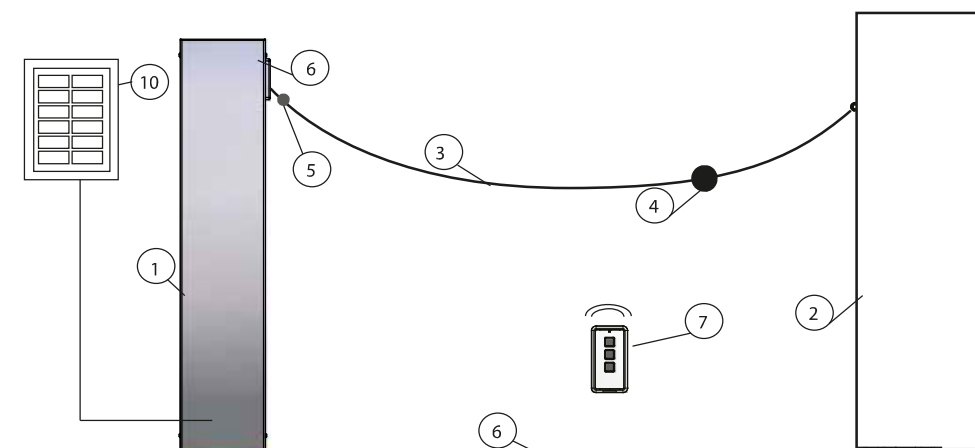

DIMENSIONS

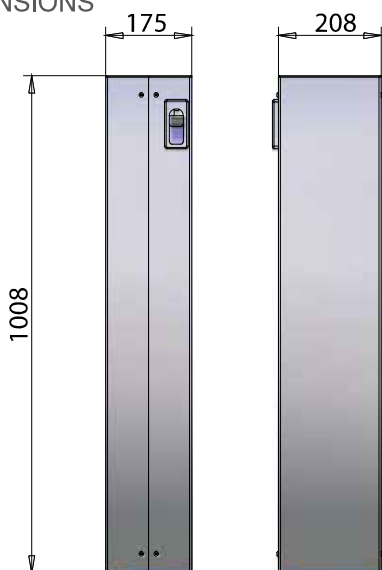

ACCESSORIES



CAT/103
galvanized steel
chain




CAT/103/inox
stainless steel
chain




CAT/103/red
galvanized and
painted chain




SOLAR/24
solar charger



CAT/102/light
underground
galvanized chain
collector



CAT/102
underground
chain collector
with cataphoresis
treatment



CAT/102/heavy
out-of-floor walk-on
chain collector made
in high-thickness
galvanized steel



CAT/106
safety chain joint